

Titan™ Dual Brewer

Features



Titan Dual Brewer

High-volume brewing solution that features simple operation, precise extraction control and portable servers

- Brews up to 34.3 gallons (129.8 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER® allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.
- Energy-saver mode reduces tank temperature during idle periods.

Model Titan Dual Brewer with 3 gallon TF Servers

(servers sold separately)

Dimensions: 40.02" H x 35.63" W x 21.74" D
(101.7cm H x 90.5cm W x 55.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-54
Product No. : 39000.0006



Easy Clear® EQHP-54L
Product No. : 39000.0003

Titan/Urn Filter Pack
Product No. : 20111.0000
Packed per case: 250
Dimensions:
20" Base x 8" Sidewall
50.8 cm Base x 20.3 cm Sidewall



Titan TF Server
Product No.: 39400.0001



Titan Funnel
Product No.: 40114.0000



Model

Titan Dual

Agency Listing



Dimensions & Specifications

| Model | Product # | Volts | Amps | Total Watts | Brewing Capacity | Cu. Ft. | Shipping Weight | Funnel Locks | Cord Attached |
|------------|------------|-----------------------|------|-------------|------------------|---------|-----------------|--------------|---------------|
| Titan Dual | 39200.0000 | 120/208 | 33.4 | 12000 | 34.3 gal/hr | 27 | 148 lbs. | Yes | No |
| | | (3-phase) *120/208 | 40.1 | 8200 | 22.9 gal/hr | 27 | 148 lbs. | Yes | No |
| Titan Dual | 39200.0001 | 120/240 | 28.9 | 12000 | 34.3 gal/hr | 27 | 148 lbs. | Yes | No |
| | | (3-phase) *120/240 | 35 | 8200 | 22.9 gal/hr | 27 | 148 lbs. | Yes | No |
| | | (single-phase) | | | | | | | |


Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 120/208V or 120/240V, 3-phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting. Requires 4 gpm minimum water flow.

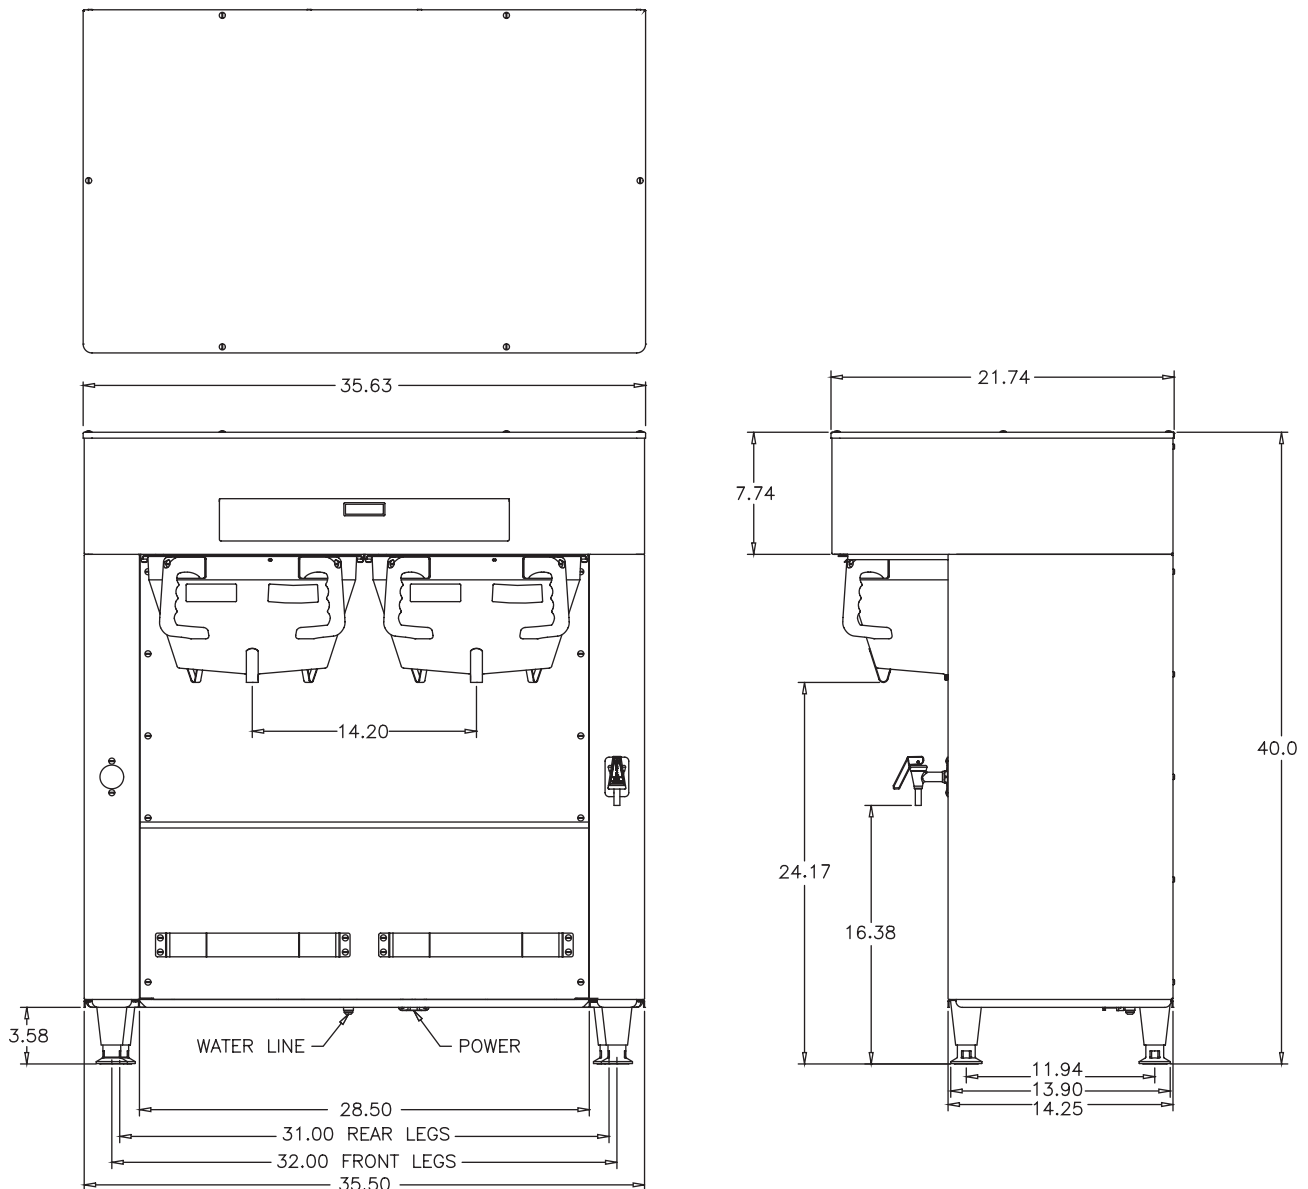

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

12/08 © Bunn-O-Matic Corporation